



9500 FRP BACK-UP FLANGES




APPLICATIONS:

Robar 9500 FRP Back-up Flanges are used to couple fiberglass pipes. Typically suited for lines with corrosive chemicals. The flanges conform to ASA B16.5 standard with a 150 pound bolt pattern.

MATERIAL SPECIFICATIONS:

Body: Cast Ductile Iron per ASTM A536 standard.
 Coating: Fusion bonded epoxy coated per AWWA C-213 standard.
 Pressure: Up to 150 PSI working pressure.
 Sizes Available: 1"– 30"

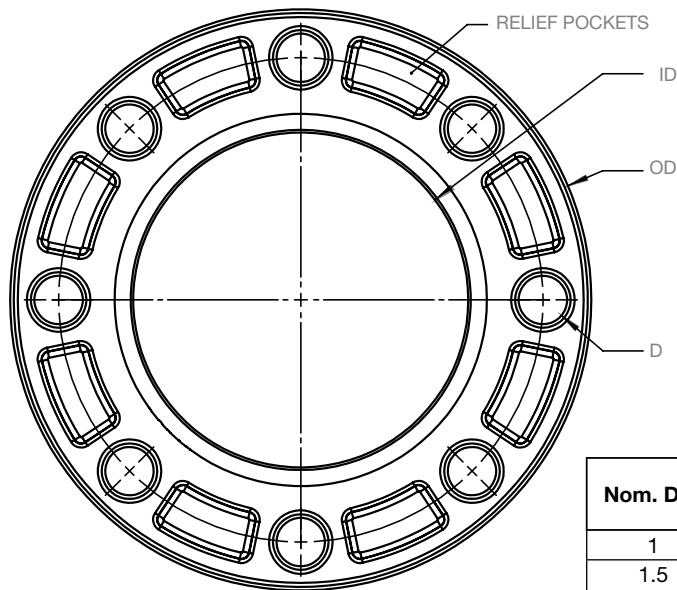

Nom. Dia.	ID	OD	D (Bolt Hole Dia.)	# Bolt Holes
1	1 15/16	4 1/2	5/8	4
1.5	2 1/4	5	5/8	4
2	3 1/8	6	3/4	4
2.5	3 1/2	7	3/4	4
3	4 3/8	7 1/2	3/4	4
4	5 3/16	9	3/4	8
6	7 11/16	11	7/8	8
8	9 3/4	13 1/2	7/8	8
10	12	16	1	12
12	14 7/8	19	1	12
14	16 1/2	21	1 1/8	12
16	18 3/4	23 1/2	1 1/8	16
18	20 1/4	25	1 1/4	16
20	22 3/8	27 1/2	1 1/4	20
24	26 3/4	32	1 3/8	20
30	33	38 3/4	1 3/8	28

All dimensions are in inches

Note: Not to be used as HDPE Back up Flange.

ROBAR INDUSTRIES LTD.

Surrey, British Columbia
 Phone: 1-800-663-6553

Saint-Bruno, Quebec
 Phone: 1-800-315-9525

Website: www.robarindustries.com / E-mail: waterworks@robarindustries.com