




5606

STAINLESS STEEL REPAIR CLAMP

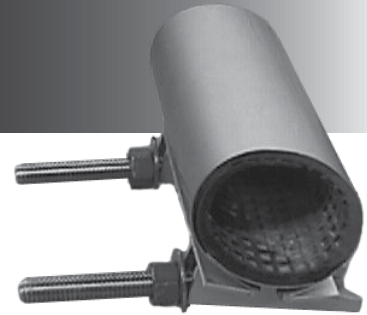

APPLICATIONS:

ROBAR **5606** Single Section Repair Clamps are used to repair small holes or breaks in water mains. The **5606** has a full wrap gasket.

MATERIAL SPECIFICATIONS:

Shell: T304 Stainless Steel, fully passivated*.
 Sidebar: T304 Stainless Steel, fully passivated*.
 Armor: T304 Stainless Steel, fully passivated*.
 Gasket: SBR (Buna S) Rubber.
 Fasteners: 1/2" NC T304 Stainless steel.
 Nuts coated with anti-galling compound.
 Torque is 45 ft. lbs.

HOW TO ORDER:

Determine the product number (**5606**), high limit of range (see table below) and length of clamp and then order by using appropriate ordering code as shown in the following example.

For a 12" long clamp on a pipe with an OD of between (6.85" - 7.10"), the ordering code is:

5606 7.10" x 12"
 product high limit of clamp
 number range width

i.e. **5606 - 7.10 x 12**

5606 REPAIR CLAMP CHART

NOMI- NAL PIPE SIZE	WORKING RANGE		APPROXIMATE SHIPPING WEIGHT (LBS.)			
	LOW	HIGH	LENGTH OF CLAMP (Common Sizes)			
			4"	6"	8"	12"
2	2.12	2.37	1.0	1.8	2.0	3.1
	2.25	2.50				
	2.37	2.62				
	2.63	2.88				
	2.87	3.12				
3	3.25	3.50	1.5	2.5	3.0	4.5
	3.50	3.75				
	3.74	3.99				
4	4.45	4.70	1.8	3.0	4.5	5.3
	4.75	5.00				
6	6.58	6.83	2.5	3.8	5.0	7.5
	6.85	7.10				
8	8.58	8.83	2.8	4.5	5.5	8.3
	9.00	9.25				

All dimensions are in inches.

Note: * Refers to chemically treating Stainless Steel after welding ("Pickled/Passivated") to return it to its original appearance.
 - Prices for special designs, lengths or diameters may be obtained from the factory on request.

ROBAR INDUSTRIES LTD.

Surrey, British Columbia
 Phone: 1-800-663-6553

Saint-Bruno, Quebec
 Phone: 1-800-315-9525

Website: www.robarindustries.com / E-mail: waterworks@robarindustries.com