



# 1200

## GALVANIZED COMPRESSION COUPLING




### APPLICATIONS

Robar 1200 Series Galvanized compression couplings are used to make a non-restrained connection between pipes of the same diameter. These eliminate the need for welding. Available in 1/2" - 2".

### MATERIAL SPECIFICATIONS

<b>Body:</b>	Cast Ductile Iron
<b>Gasket:</b>	NBR (Buna N) Rubber
<b>Coating:</b>	Galvanized finish for corrosion resistance
<b>PSI Rating:</b>	150 psi

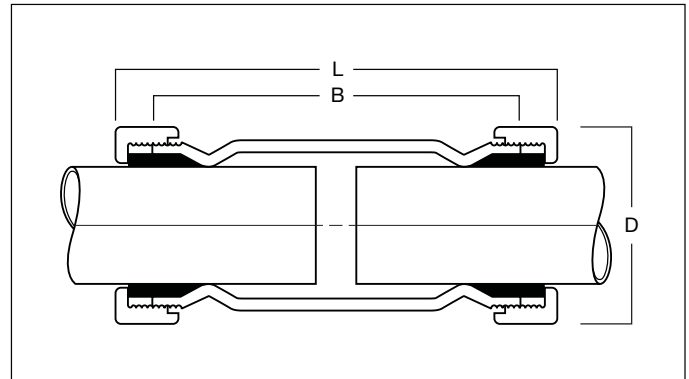

NOMINAL PIPE SIZE	PIPE O.D.	OVERALL DIMENSIONS			APROX. WEIGHT (LBS)	CARTON WEIGHT (LBS)	CARTON QUANTITY
		B	D	L			
1/2	.84	3.49	1.71	4.29	.8	11	12
3/4	1.05	3.70	1.92	4.42	1	13	12
1	1.32	4.02	2.28	4.83	1.5	19	12
1 1/4	1.66	4.11	2.58	4.95	2	23	12
1 1/2	1.90	4.30	2.77	5.02	2	25	12
2	2.375	4.57	3.34	5.34	3	37	12

All dimensions are in inches.

**CAUTION**  Couplings do not prevent pipe pullout. Suitable restraint should be used when required.

### ROBAR INDUSTRIES LTD.

www.robarindustries.com  
waterworks@robarindustries.com

Surrey, British Columbia  
Phone: 1-800-663-6553

Saint-Bruno, Quebec  
Phone: 1-800-315-9525