



# 1200 GALVANIZED COMPRESSION COUPLING




## APPLICATIONS:

Robar **1200 Series** Galvanized compression couplings are used to make a non-restrained connection between pipes of the same diameter. These eliminate the need for welding. Available in 1/2" - 2".

## MATERIAL SPECIFICATIONS:

Body: Cast Ductile Iron  
 Gasket: NBR (Buna N) Rubber  
 Coating: Galvanized finish for corrosion resistance

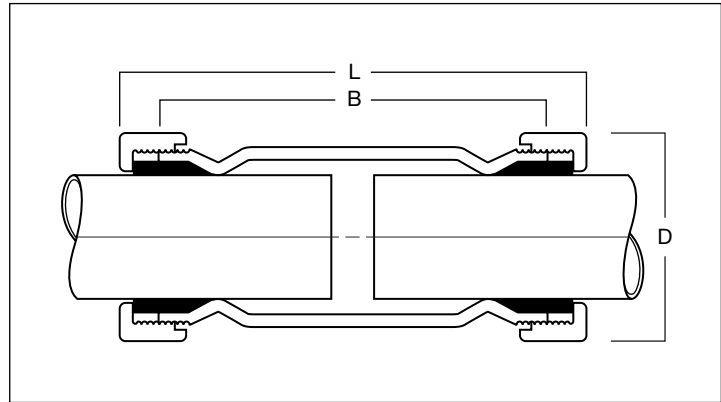

NOMINAL PIPE SIZE	PIPE O.D.	OVERALL DIMENSIONS			APROX. WEIGHT (LBS)	CARTON WEIGHT (LBS)	CARTON QUANTITY
		B	D	L			
1/2	.84	3.49	1.71	4.29	.8	11	12
3/4	1.05	3.70	1.92	4.42	1	13	12
1	1.32	4.02	2.28	4.83	1.5	19	12
1 1/4	1.66	4.11	2.58	4.95	2	23	12
1 1/2	1.90	4.30	2.77	5.02	2	25	12
2	2.375	4.57	3.34	5.34	3	37	12

All dimensions are in inches.

### CAUTION



Couplings do not prevent pipe pullout. Suitable restraint should be used when required.

Note: - Compression x Male adapters available.

## ROBAR INDUSTRIES LTD.

Surrey, British Columbia  
 Phone: 1-800-663-6553

Saint-Bruno, Quebec  
 Phone: 1-800-315-9525

Website: [www.robarindustries.com](http://www.robarindustries.com) / E-mail: [waterworks@robarindustries.com](mailto:waterworks@robarindustries.com)